

3G3M1

The Integrated Global Solution

- IM and PM motor control in OLV & CLV (200% torque at 0Hz).
- Multiple ratings: HHD 150%/1 min and HND 120%/1 min.
- 590 Hz max Output frequency
- Torque control for IM in OLV/CLV, PM in CLV.
- Speed, Position and Gear function.
- Flexible EtherCAT configuration: Standard and Ring topology.
- Built-in 1 encoder / pulse counter input.
- Safe Stop 0 (STO SIL3 PLe) wired and FSoE
- 24 VDC backup supply for control board.
- USB programming port.
- Program download without power supply
- Predictive maintenance drive parameters.
- Energy saving dedicated functionality.
- PC configuration tool: Sysmac Studio IDE
- Coated PCB for dust and moisture resistance.
- 10 years 24/7 Maintenance Free operation
- CE, UKCA, cULus, KC, RCM and RoHS.

Ratings:


200 V Class single-phase 0.2 to 3.7 KW

200 V Class three-phase 0.2 to 18.5 KW

400 V Class three-phase 0.4 to 22 KW



System configuration

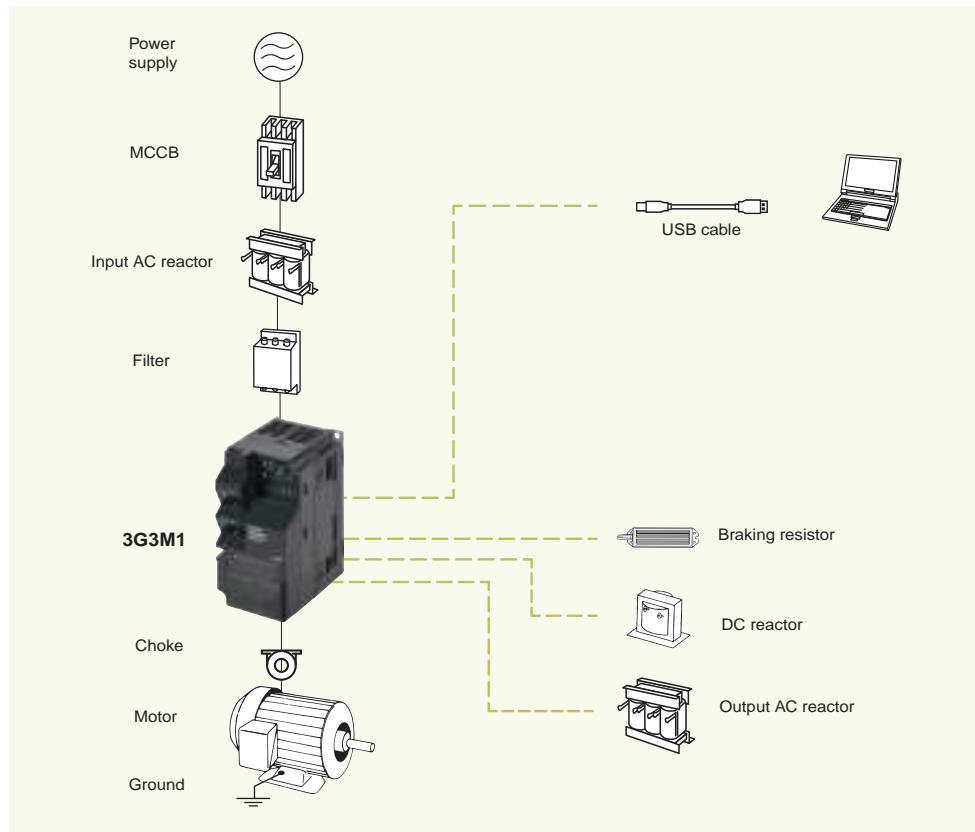

Type designation

3G3M1 - A 4 0 0 2-ECT

Drive

Series

IP20 protection

Built-in Ethercat

Voltage:

B: Single-phase 200 VAC

2: Three-phase 200 VAC

4: Three-phase 400 VAC

Rated power:

1-phase 200 VAC: 0.2 to 3.7 KW

3-phase 200 VAC: 0.2 to 18.5 KW

3-phase 400 VAC: 0.4 to 22 KW

Single-phase 200 V: 3G3M1-A□-ECT		Duty rating	B002	B004	B007	B015	B022	B037		
Max. applicable motor output (kW)	HHD	0.2	0.4	0.75	1.5	2.2	3.7			
	HND	0.4	0.55	1.1	2	2.7	—			
Drive capacity (kVA) 200 V	HHD	0.6	1	1.7	2.8	3.8	6.1			
	HND	0.7	1.2	2.1	3.3	4.2	—			
Drive capacity (kVA) 240 V	HHD	0.7	1.2	2.1	3.3	4.6	7.3			
	HND	0.8	1.5	2.5	4	5	—			
Rated output current (A)	HHD	1.6	3	5	8	11	17.5			
	HND	1.9	3.5 ¹	6.0 ¹	9.6 ¹	12 ¹	—			
Overload tolerance		HHD: 150% of the rated output current for 60 seconds or 200% 0.5s HND: 120% of the rated output current for 60 seconds								
Carrier frequency (no-derating)		HND: 4 kHz HHD: 8kHz					HHD: 8kHz			
Max. output voltage		Three-phase 200 to 240 V (with AVR)								
Max. output frequency		590.0 Hz								
Power supply	Rated voltage and frequency		1-phase AC power supply 200-240 V at 50/60 Hz DC power supply 270-340 VDC							
	Allowable voltage fluctuation		−15% to +10%							
	Allowable frequency fluctuation		±5%							
Braking	Rated Input current	HHD	3.3	5.4	9.7	16.4	22	45.4		
		HND	4.9	7.3	13.8	20.2	26	—		
Braking	Rated Input current DC reactor	HHD	2.0	3.5	6.4	11.6	17.5	31.8		
		HND	3.7	4.6	9.4	17.9	25.0	—		
Braking	Rated power capacity	HHD	0.4	0.7	1.3	2.4	3.5	6.4		
		HND	0.8	1.0	1.9	3.6	5.5	—		
Braking	Natural deceleration braking torque (%) without resistor	HHD		100		70	40	40		
		HND		73	68	48	29	—		
Minimum connectable resistor (Ohms)						40				
Weight (kg)		0.5	0.6	0.9	1.4	1.7	3.8			

¹: Values for 40°C ambient temperature

Note: "Applicable motor" represents standard three-phase motors. When using other types of motors, make sure that the rated current of the motor does not exceed that of the inverter.

Output voltage cannot exceed the power supply voltage.

For higher carrier frequency confirm with carrier derating tables in manual

The value is calculated assuming that the inverter is connected with a power supply with the capacity of 500 kVA (or 10 times the inverter capacity if the inverter capacity exceeds 50 kVA) and %X is 5%.

Three-phase 200 V: 3G3M1-A□-ECT		Duty rating	2002	2004	2007	2015	2022	2037	2055	2075	2110	2150	2185							
Max. applicable motor output (kW)		HHD	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5							
		HND	0.4	0.75	1.1	2.2	3	5.5	7.5	11	15	18.5	22							
Output characteristics	Drive capacity (kVA) 200 V		HHD	0.6	1	1.7	2.8	3.8	6.1	8.7	11	16	21	26						
			HND	0.7	1.2	2.1	3.3	4.2	6.8	10	14	19	24	30						
	Drive capacity (kVA) 240 V		HHD	0.7	1.2	2.1	3.3	4.6	7.3	10	14	20	25	32						
			HND	0.8	1.5	2.5	4.0	5.0	8.1	12	17	23	29	37						
	Rated output current (A)		HHD	1.6	3	5	8	11	17.5	25	33	47	60	76						
			HND	2	3.5	6	9.6	12 ^{*1}	19.6 ^{*1}	30	40	56	69	88						
Overload tolerance		HHD: 150% of the rated output current for 60 seconds or 200% 0.5s HND: 120% of the rated output current for 60 seconds																		
Carrier frequency (no-derating)		HHD: 8 kHz HND: 4 kHz						HHD: 10 kHz HND: 10 kHz												
Max. output voltage		Three-phase 200 to 240 V (with AVR)																		
Max. output frequency		590.0 Hz																		
Power supply	Rated voltage and frequency		3-phase AC power supply 200-240 V at 50/60 Hz DC power supply 270-340 VDC																	
	Allowable voltage fluctuation		-15% to +10%																	
	Allowable frequency fluctuation		±5%																	
	Rated Input current	HHD	1.8	3.1	5.3	9.5	13.2	22.2	31.5	42.7	60.7	80	97							
		HND	2.6	4.9	6.7	12.8	17.9	28.5	42.7	60.7	80	97	112							
	Rated Input current DC reactor	HHD	0.93	1.6	3.0	5.7	8.3	14.0	21.1	28.8	42.2	57.6	71.0							
		HND	1.6	3.0	4.3	8.3	11.7	19.9	28.8	42.2	57.6	71.0	84.4							
	Rated power capacity	HHD	0.4	0.6	1.1	2.0	2.9	4.9	7	10	15	20	25							
		HND	0.6	1.1	1.5	2.9	4.1	6.9	10	15	20	25	30							
Braking	Natural deceleration braking torque (%) without resistor		HHD	150	100	70	40		20											
			HND	75	53	68	48	29	27	15										
Minimum connectable resistor (Ohms)		100				40		33	20	15	10	8.6	4							
Weight (kg)		0.5	0.6	0.8	1.4	1.4	1.7	3.8	4	5.3	5.4	11								

^{*1}. Values for 40°C ambient temperature

Note: "Applicable motor" represents standard three-phase motors. When using other types of motors, make sure that the rated current of the motor does not exceed that of the inverter.

Output voltage cannot exceed the power supply voltage.

For higher carrier frequency confirm with carrier derating tables in manual

The value is calculated assuming that the inverter is connected with a power supply with the capacity of 500 kVA (or 10 times the inverter capacity if the inverter capacity exceeds 50 kVA) and %X is 5%.

Three-phase 400 V: 3G3M1-A□-ECT		Duty rating	4004	4007	4015	4022	4030	4040	4055	4075	4110	4150	4185	4220								
Max. applicable motor output (kW)		HD	0.75	1.1	2.2	3	4	5.5	7.5	11	15	18.5	22	30								
		ND	0.75	1.5	2.2	3	4	5.5	11	15	18.5	22	30	37								
		HHD	0.4	0.75	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22								
		HND	0.75	1.1	2.2	3 ^{*1}	4	5.5 ^{*1}	7.5	11	15	18.5	22	30								
Output characteristics	Drive capacity (kVA) 380 V	HD	1.2	2.2	3.3	4.1	5.8	7.3	12	15	20	25	30	39								
		ND	1.4	2.7	3.6	4.5	6.1	7.9	14	19	24	29	39	47								
		HHD	1.2	2.2	3.2	3.6	4.7	6.1	9.7	12	16	20	26	30								
		HND	1.4	2.7	3.6	4.5	5.8	7.3	12	15	20	25	30	39								
	Drive capacity (kVA) 480 V	HD	1.5	2.8	4.2	5.2	7.3	9.2	15	19	26	32	37	50								
		ND	1.7	3.4	4.6	5.7	7.6	10	18	24	31	37	49	60								
		HHD	1.5	2.8	4	4.6	6	7.6	12.3	15	20	26	32	37								
		HND	1.7	3.4	4.6	5.7	7.3	9.2	15	19	26	32	37	50								
	Rated output current (A)	HD	1.8	3.4	5.0	6.3	8.8	11.1	17.5	23	31	38	45	60								
		ND	2.1	4.1	5.5	6.9	9.2	12	21.5	28.5	37	44	59	72								
		HHD	1.8	3.4	4.8	5.5	7.2	9.2	14.8	18	24	31	39	45								
		HND	2.1	4.1	5.5	6.9	8.8	11.1	17.5	23	31	38	45	60								
Overload tolerance		HHD: 150% of the rated output current for 60 seconds or 200% 0.5s HD: 150% of the rated output current for 60 seconds HND/ND: 120% of the rated output current for 60 seconds																				
Carrier frequency (no-derating)		HHD/HND: 8 kHz HD/ND: 4 kHz						HHD/HND: 10 kHz HD/ND: 4 kHz														
Max. output voltage		Proportional to input voltage: 380-480 V																				
Max. output frequency		590 Hz																				

Three-phase 400 V: 3G3M1-A□-ECT		Duty rating	4004	4007	4015	4022	4030	4040	4055	4075	4110	4150	4185	4220	
Power supply	Rated voltage and frequency		3-phase AC power supply 380-480 V at 50/60 Hz												
	Allowable voltage fluctuation		-15% to +10%												
	Allowable frequency fluctuation		±5%												
	Rated Input current	HD	2.7	3.9	7.3	11.3	14.2	16.8	23.2	33.0	43.8	52.3	60.6	77.9	
		ND	2.7	4.8	7.3	11.3	14.2	16.8	33.0	43.8	52.3	60.6	77.9	94.3	
		HHD	1.7	3.1	5.9	8.2	11.3	14.2	17.3	23.2	33.0	43.8	52.3	60.6	
		HND	2.7	3.9	7.3	11.3	14.2	16.8	23.2	33.0	43.8	52.3	60.6	77.9	
	Rated Input current DC reactor	HD	1.5	2.1	4.2	5.8	7.7	10.1	14.4	21.1	28.8	35.5	42.2	57.0	
		ND	1.5	2.9	4.2	5.8	7.7	10.1	21.1	28.8	35.5	42.2	57.0	68.5	
		HHD	0.85	1.6	3.0	4.4	5.8	7.7	10.6	14.4	21.1	28.8	35.5	42.2	
		HND	1.5	2.1	4.2	5.8	7.7	10.1	14.4	21.1	28.8	35.5	42.2	57.0	
	Required power capacity	HD	1.1	1.5	3.0	4.1	5.4	7.0	10	15	20	25	29	39	
		ND	1.1	2.1	3.0	4.1	5.4	7.0	15	20	25	29	39	47	
		HHD	0.6	1.2	2.1	3.1	4.1	5.4	7.3	10	15	20	25	29	
		HND	1.1	1.5	3.0	4.1	5.4	7.0	10	15	20	25	29	39	
Braking	Natural deceleration braking torque (%) without resistor	HD	53	68	48	29	29	27	15						
		ND	53	50	48	29	29	27	12						
		HHD	100		70	40	40	40	20						
		HND	53	68	48	29	29	27	15						
Minimum connectable resistor (Ohms)		200		160		130		80	60	40	34.4	16			
Weight (kg)		1.2	1.4	1.5	1.4	1.8	1.8	3.7	3.8	5.3	5.4	11	11		

*1. Values for 40°C ambient temperature

Note: "Applicable motor" represents standard three-phase motors. When using other types of motors, make sure that the rated current of the motor does not exceed that of the inverter.

Output voltage cannot exceed the power supply voltage.

For higher carrier frequency confirm with carrier derating tables in manual







The value is calculated assuming that the inverter is connected with a power supply with the capacity of 500 kVA (or 10 times the inverter capacity if the inverter capacity exceeds 50 kVA) and %X is 5%.

Common specifications

Model number 3G3M1-A□-ECT		Specifications
Control functions	Control methods	V/f, Dynamic torque vector and vector control with and without feedback.
	Motor support	Asynchronous Induction motor Permanent Magnet synchronous motor (Only Vector control with and without feedback)
	Frequency control range	0.00 to 590.0 Hz
	Frequency tolerance	Digital inputs: ±0.01% of the max. output frequency Analog inputs: ±0.2% of the max. output frequency (25 ±10 °C)
	Frequency setting resolution	Digital inputs: 0.01 Hz Analog inputs: Maximum frequency × 5/10,000 Communication setting: 0.005% of the maximum output frequency or 0.01 Hz (fixed)
	Output frequency resolution	0.001 Hz
	Frequency setting signal	Main speed freq reference: -10 to 10 VDC (22 kΩ)
	Starting torque	V/f: 150%/10% of rated speed 200% /0.5Hz Vector without sensor or V/f with feedback 200%/0.0 Hz Vector with feedback
	Speed control range	1:100 V/f mode 1:200 Dynamic torque vector without feedback / vector without feedback / V/f with feedback 1:500 Dynamic torque vector with feedback 1:1500 Vector control with feedback
	Zero speed control	Vector with feedback
	Torque limits	4 quadrant and 4 independent settings
	Accel/Decel Time	0.00 to 6000s (the drive can set two pairs of different acceleration and deceleration times)
Functionality	Protective functions	Overcurrent, Overvoltage, Undervoltage, Electronic thermal, Temperature error, Ground-fault current at power-on, Rush current prevention circuit, Overload limit, Incoming overvoltage, External trip, Memory error, CPU error, USP error, Communication error, Overvoltage suppression during deceleration, Power interruption protection, Emergency shutdown, etc.
	Main control functions	Torque boost, AVR control, Energy saving, Motor sound, slip compensation, DC injection, Frequency auto-search, current limiter, ASR control, zero speed control servo lock, heavy deceleration brake, pre-excitation, Positioning, Master-Slave follower, overload stop, second motor, brake control,
Environment	Operation ambient temperature	-10 to 50°C (Derating required)
	Storage ambient temperature	-25 to 70°C (Short-time temperature during shipment)
	Operating ambient humidity	5 to 95% (with no condensation)
	Vibration resistance	Vibration Frequency Specification 2 to 9 Hz à 3 mm (0.12 inch) (Max. amplitude) 9 to 20 Hz à 1 G 20 to 55 Hz à 0.2 G 55 to 200 Hz à 0.1 G
	Location	Maximum altitude of 1,000 m, indoors (without corrosive gases or dust). From 1,000 to 3,000 a derating of 0.6% every 100m should be applied.







Model number 3G3M1-A□-ECT		Specifications
Regulations and Standards	CE UKCA	EMC EN 61800-3:2004/A1:2012 (2018 is ratified)
		Functional safety IEC 61800-5-2:2016 IEC/EN 61800-5-2:2017 STO SIL3 EN ISO 13849-1:2015, Cat.3 / Plc (2016 already exist)
		Electrical safety EN 61800-5-1:2017
	UL	US UL61800-5-1, Edition 1, 2012 (A1 2017 ratified)
		CA CSA-C22.2 No.274, 2017
	KC	KS-C9800-3 (Pending)
	EAC	–
RCM		EN 61800-3:2004+A1:2012 (2016 ratified)
Protection design		Open chassis type: IP20

Dimensions

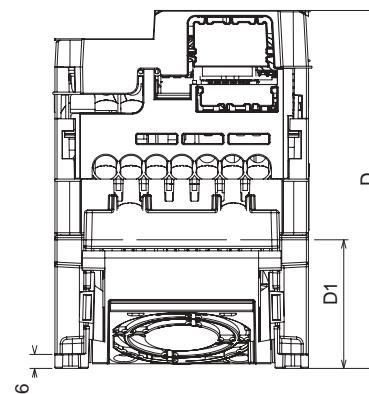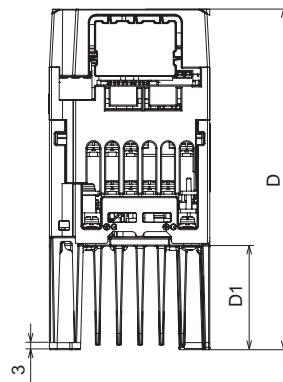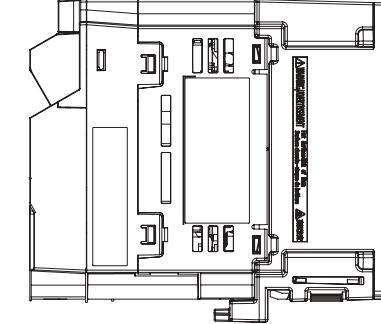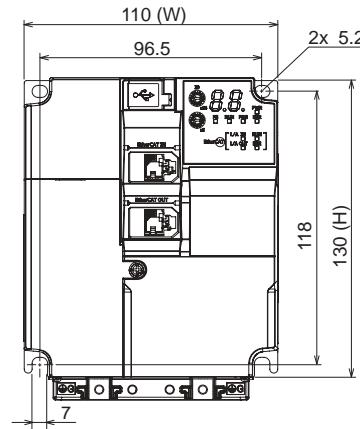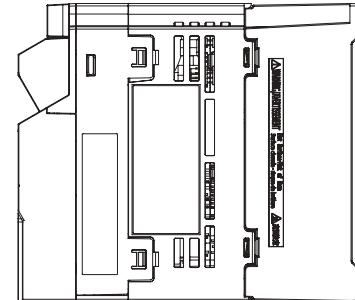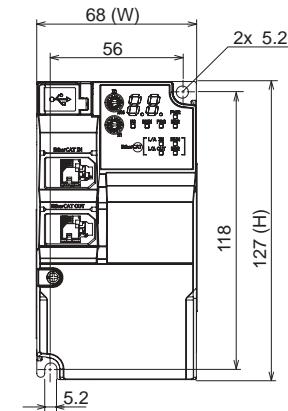





Power Supply	Model	W (mm)	H (mm)	D (mm)	D1 (mm)
Single-phase 200 V	3G3M1-AB002-ECT	68	127	98	8
	3G3M1-AB004-ECT			120	23
	3G3M1-AB007-ECT			165	48
Three-phase 200 V	3G3M1-A2002-ECT	110	130	98	8
	3G3M1-A2004-ECT			113	23
	3G3M1-A2007-ECT			145	48

Power supply	Model	W (mm)	H (mm)	D (mm)	D1 (mm)
Single-phase 200 V	3G3M1-AB015-ECT	166	130	166	58
	3G3M1-A2015-ECT			156	
	3G3M1-A2022-ECT			132	
Three-phase 400 V	3G3M1-A4004-ECT	110	130	156	38
	3G3M1-A4007-ECT			156	
	3G3M1-A4015-ECT			156	
	3G3M1-A4022-ECT				

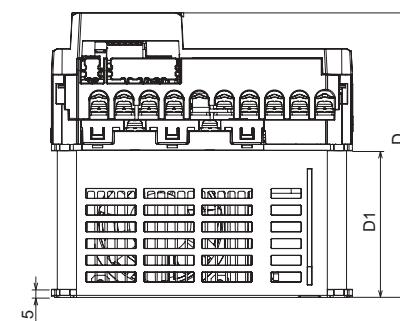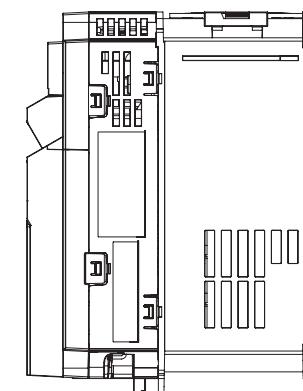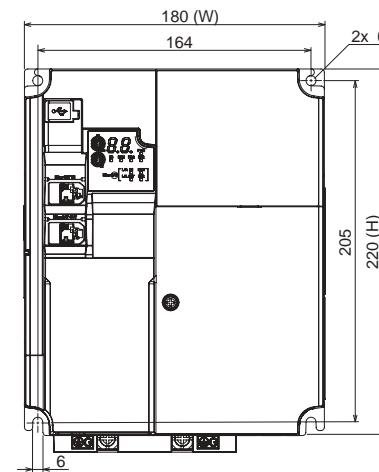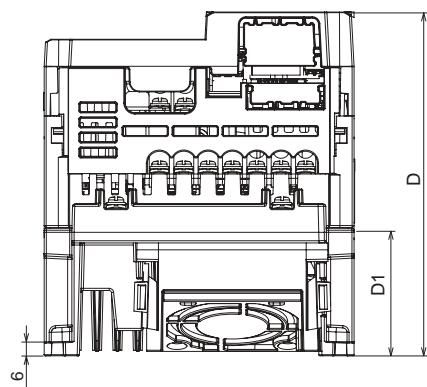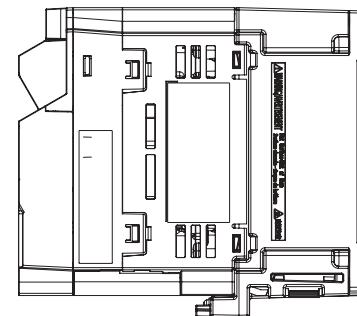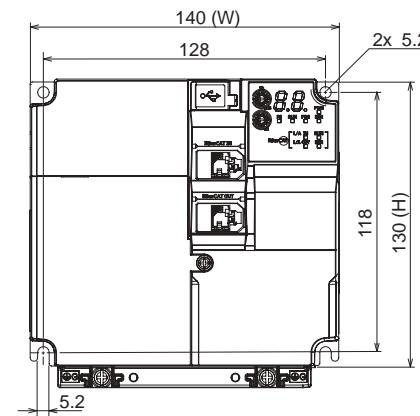

Power supply	Model	W (mm)	H (mm)	D (mm)	D1 (mm)
Single-phase 200 V	3G3M1-AB022-ECT	140	130	156	58
Three-phase 200 V	3G3M1-A2037-ECT				
Three-phase 400V	3G3M1-A4030-ECT 3G3M1-A4040-ECT				

Power supply	Model	W (mm)	H (mm)	D (mm)	D1 (mm)
Single-phase 200 V	3G3M1-AB037-ECT	180	220	171	87.7
Three-phase 200 V	3G3M1-A2055-ECT				
Three-phase 400 V	3G3M1-A2075-ECT 3G3M1-A4055-ECT 3G3M1-A4075-ECT				

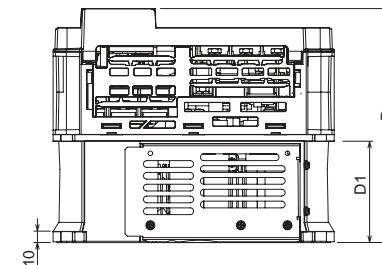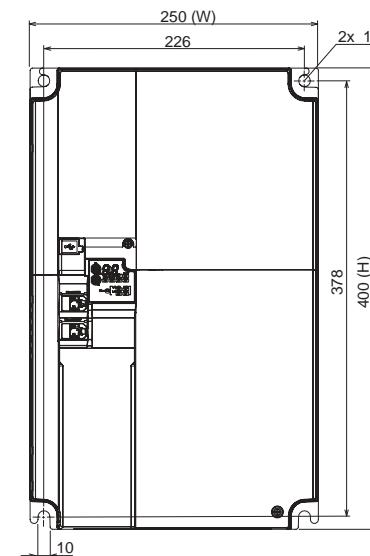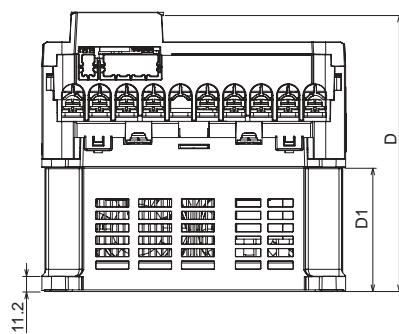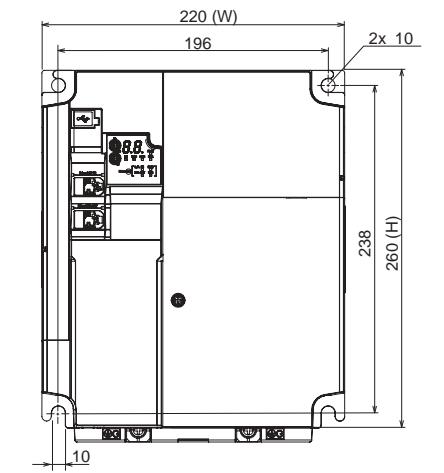



Power supply	Model	W (mm)	H (mm)	D (mm)	D1 (mm)
Three-phase 200 V	3G3M1-A2110-ECT	220	260	203	90
	3G3M1-A2150-ECT				
Three-phase 400 V	3G3M1-A4110-ECT				90
	3G3M1-A4150-ECT				

Power supply	Model	W (mm)	H (mm)	D (mm)	D1 (mm)
Three-phase 200 V	3G3M1-A2185-ECT	250	400	203	90
	3G3M1-A4185-ECT				
Three-phase 400 V	3G3M1-A4220-ECT				


Line filters

AX-FIC1014-SE


AX-FIC1021-SE

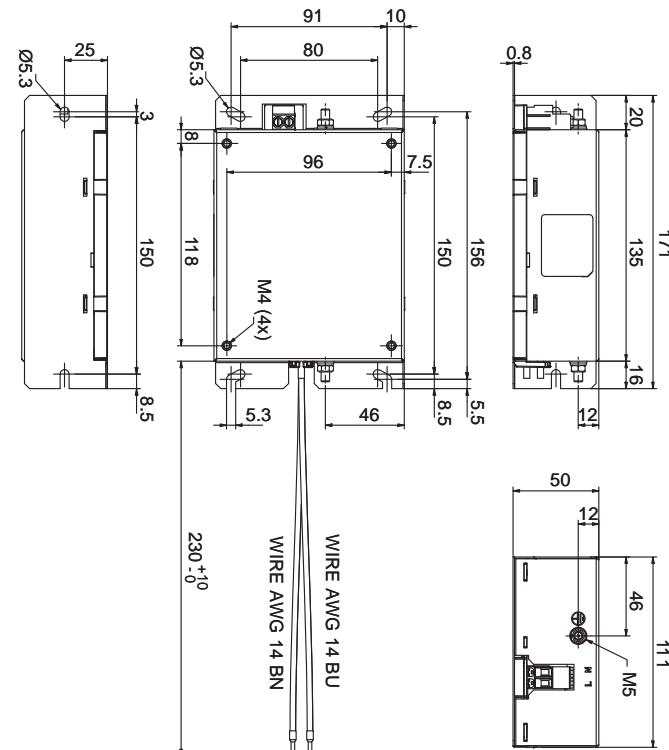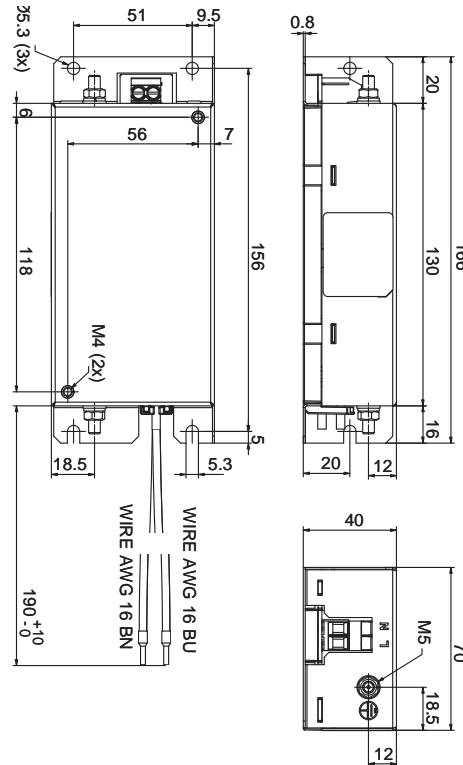


AX-FIC1026-SE

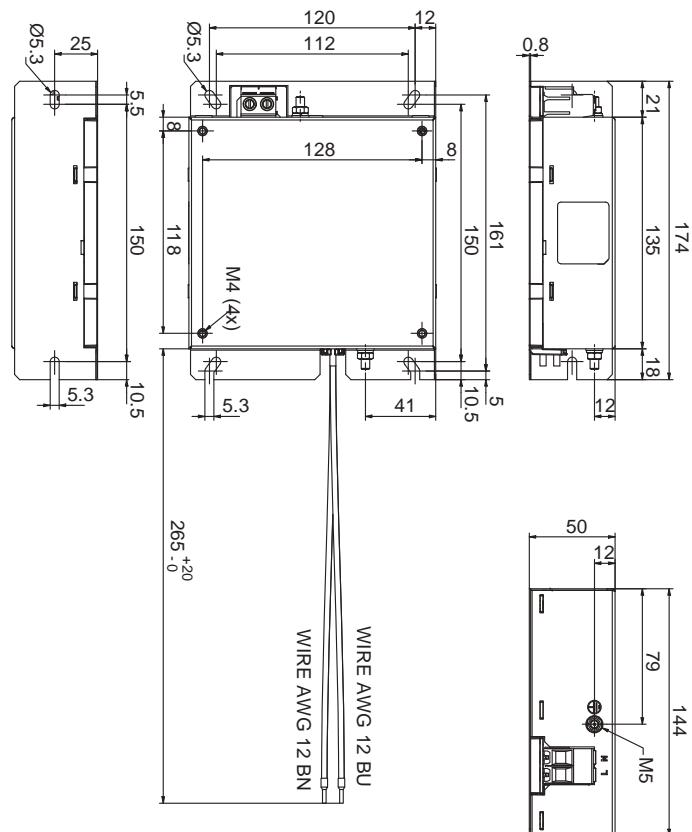


AX-FIC1045-SE

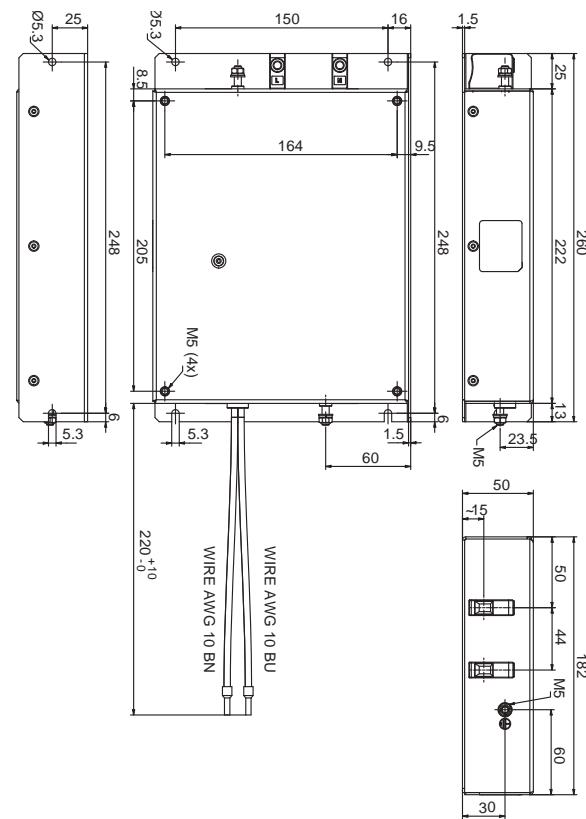


AX-FIC4004-SE

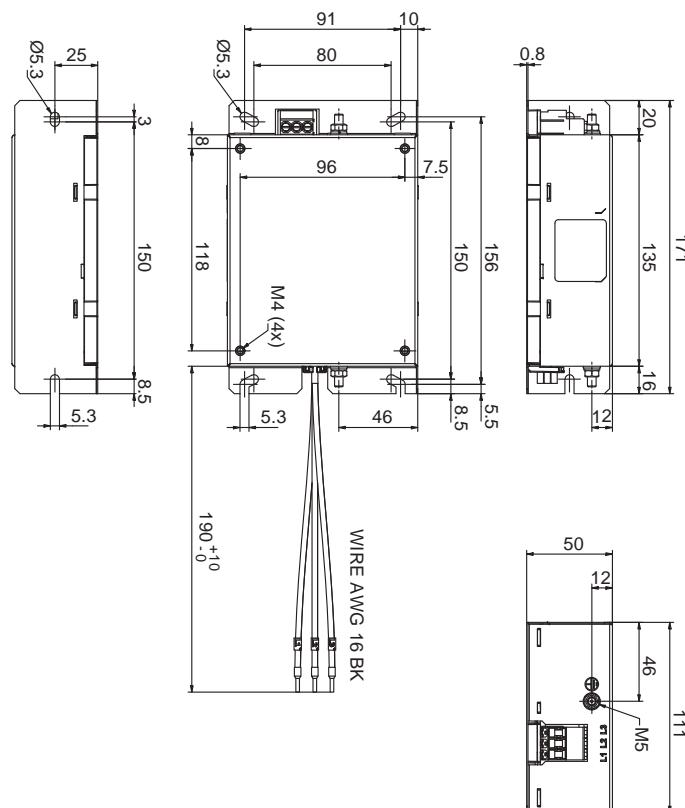


AX-FIC4011-SE

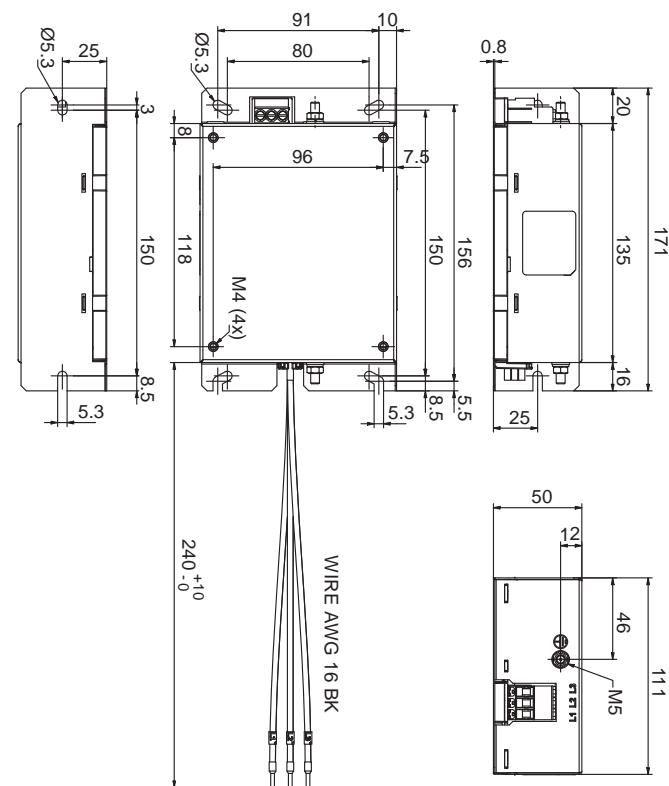


AX-FIC4017-SE

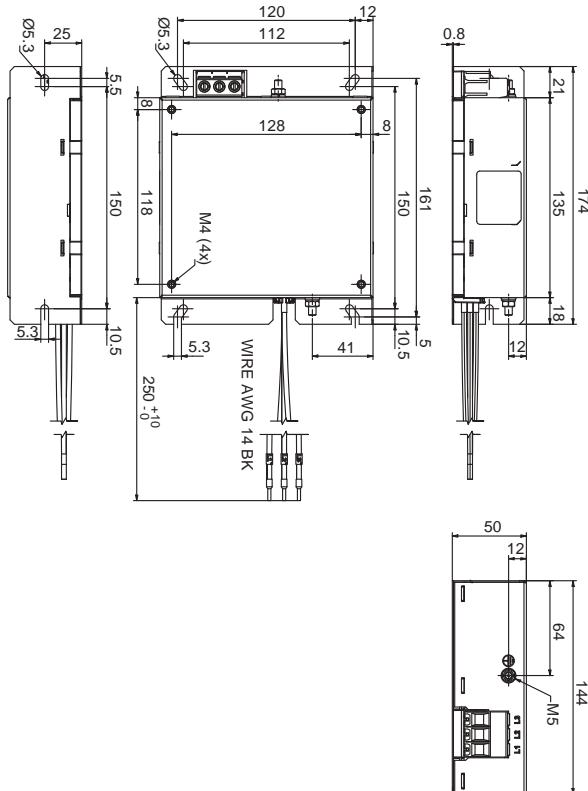


AX-FIC4044-SE

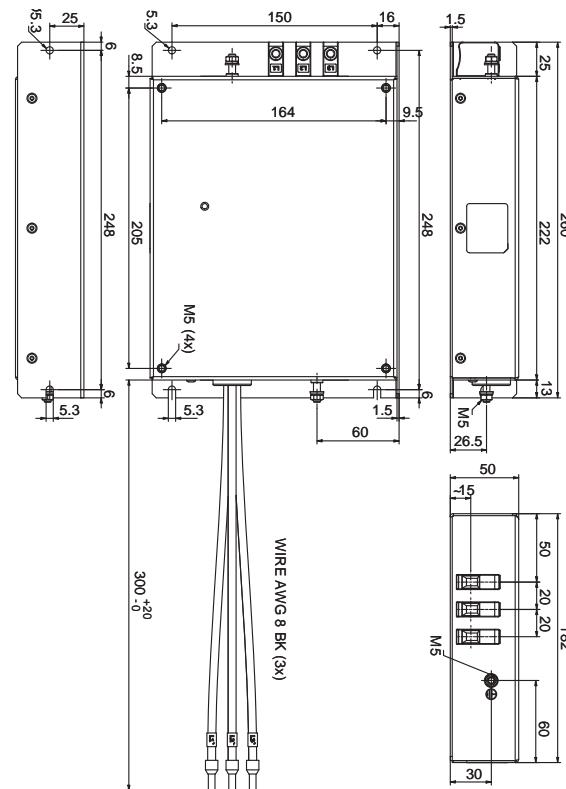

AX-FIC4061-SE

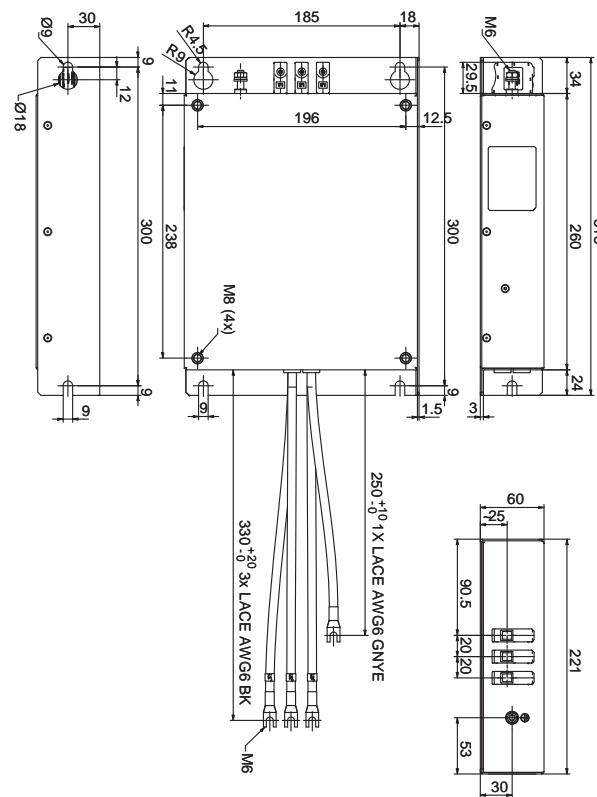

AX-FIC4095-SE

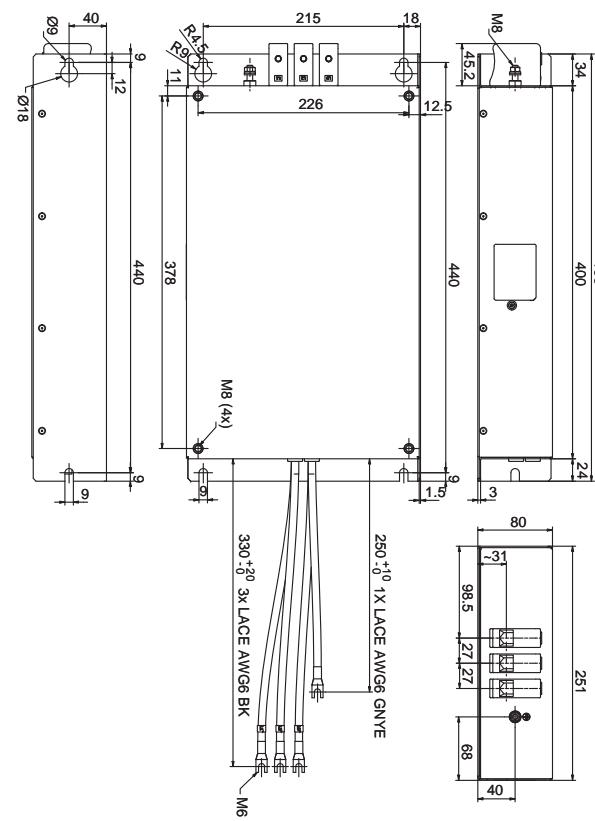

Input AC Reactor

Voltage	Reference	Fig	Dimensions (mm)										Weight (kg)
			A	B	B2	C	C2	D	E	F	G	H	
Single-phase 200 V	AX-RAI02000070-DE	1	84	113	-	96 116 131	-	101	66	5	7.5	2	1.22
	AX-RAI01700140-DE												1.95
	AX-RAI01200200-DE												2.55
	AX-RAI00630240-DE												1.95
Three-phase 200 V	AX-RAI00210330-DE	2	120	180	-	80 116 120 80 52 62 190 205 140 55 6	70 116 120 80 52 62 190 205 140 55 6	101 66 5 7.5	5.5 5.5 6.5 1.78 2.35 5.5 6.5 1.78 5.5 2.35 5.5 6.5 11.2 16.0	-	-	-	2.35
	AX-RAI02920030-DE												1.78
	AX-RAI01570050-DE												2.35
	AX-RAI00940080-DE												5.5
	AX-RAI00670110-DE												6.5
	AX-RAI00450170-DE												1.78
	AX-RAI00290250-DE												2.35
	AX-RAI00210330-DE												5.5
	AX-RAI00180670-DE												6.5
	AX-RAI001110600-DE												1.78
	AX-RAI00076870-DE												2.35
	AX-RAI00091000-DE												5.5
Three-phase 400 V	AX-RAI07700042-DE	2	120	180	-	70 75 80 85 105 110	120 195 120 190 205 275 200	80 140 80 140 205 275 200	52 55 62 55 75	5.5 6 5.5 5.5 6 7.5	-	-	5.5
	AX-RAI03700040-DE												2.35
	AX-RAI02800080-DE												5.5
	AX-RAI01630090-DE												6.5
	AX-RAI01300170-DE												11.2
	AX-RAI00810180-DE												16.0
	AX-RAI00740335-DE												1.78
	AX-RAI00440300-DE												2.35
	AX-RAI00300450-DE												5.5
	AX-RAI00360500-DE												6.5
	AX-RAI00290780-DE												11.2
	AX-RAI00191150-DE												16.0

Figure 1


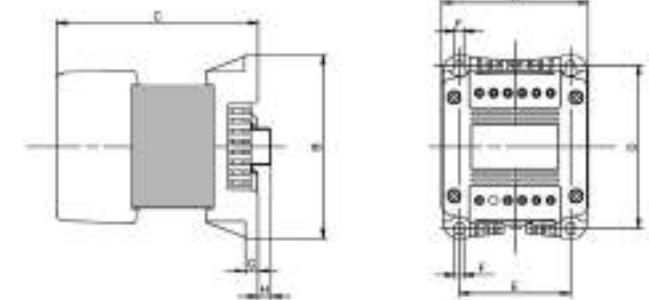


Figure 2

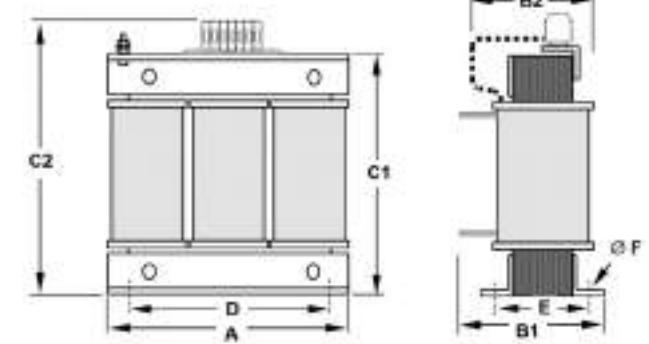

DC Reactor

Voltage	Reference	Fig	Dimensions (mm)								Weight	
			A	B	C	D	E	F	G	H		
200 V	AX-RC21400016-DE	1	84	113	96	101	66	5	7.5	2	1.22	
	AX-RC10700032-DE				105						1.60	
	AX-RC06750061-DE				116						1.95	
	AX-RC03510093-DE				108	135	124	120	82	6.5	9.5	
	AX-RC02510138-DE		120	152	136	135	94	7	9.5	-	3.20	
	AX-RC01110309-DE				146						5.20	
	AX-RC00840437-DE				150	177	160	160	115		6.00	
	AX-RC00590614-DE				183	11.40						
	AX-RC00440859-DE				195	161	163	185	88	10	-	
	AX-RC00301275-DE	2			195	161	163	185	88	10	-	17
400 V	AX-RC43000020-DE	1	84	113	96	101	66	5	7.5	2	1.22	
	AX-RC27000030-DE				105						1.60	
	AX-REC14000047-DE				116						1.95	
	AX-RC10100069-DE				108	135	133	120	82	6.5	9.5	
	AX-RC06400116-DE		120	152	136	135	94	7	9.5	-	3.70	
	AX-RC04410167-DE				146						5.20	
	AX-RC03350219-DE				150	177	160	160	115		6.00	
	AX-RC02330307-DE				183	11.4						
	AX-RC01750430-DE				195	161	163	185	88	10	-	
	AX-RC01200644-DE				196	163	185	123	14.3			
	AX-RC00920797-DE				195	17						
					196	25						

Figure 1



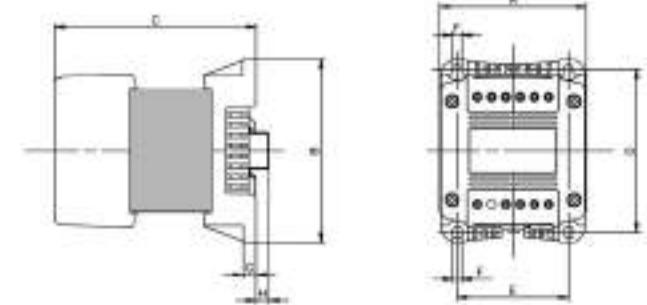


Figure 2



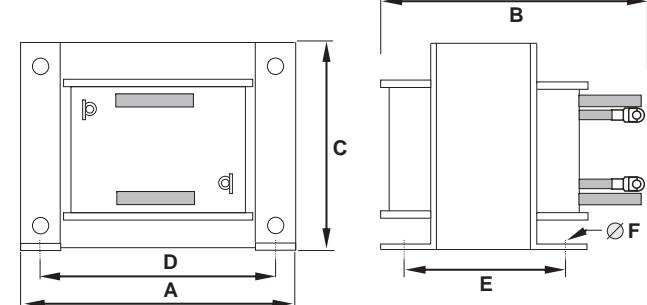


Output AC Reactor

Voltage	Reference	Dimensions (mm)						Weight (kg)
		A	B2	C2	D	E	F	
200 V	AX-RAO11500026-DE	120	70	120	80	52	5.5	1.78
	AX-RAO07600042-DE		80			62		2.35
	AX-RAO04100075-DE		85	195	140	55	6	5.5
	AX-RAO03000105-DE		95	210		65		6.5
	AX-RAO01830160-DE	180	105	210	140	75		9.1
	AX-RAO01150220-DE		110			11.7		11.7
	AX-RAO00950320-DE		120			16.0		16.0
	AX-RAO00630430-DE	240	110	275	200	75	6	16.0
	AX-RAO00490640-DE		120	281		85		18.6
	AX-RAO00390800-DE		120	281		85		18.6
400 V	AX-RAO16300038-DE	120	80	120	80	62	5.5	2.35
	AX-RAO11800053-DE		85	195	140	55		5.5
	AX-RAO07300080-DE		95	210		65		6.5
	AX-RAO04600110-DE		110	275	200	75		9.1
	AX-RAO03600160-DE	180	120	281		85	6	16.0
	AX-RAO02500220-DE		120	281		85		18.6
	AX-RAO02000320-DE		120	281		85		18.6
	AX-RAO01650400-DE	240	120	281		85		18.6
	AX-RAO01300480-DE		120	281		85		18.6
	AX-RAO00800750-DE		120	281		85		18.6

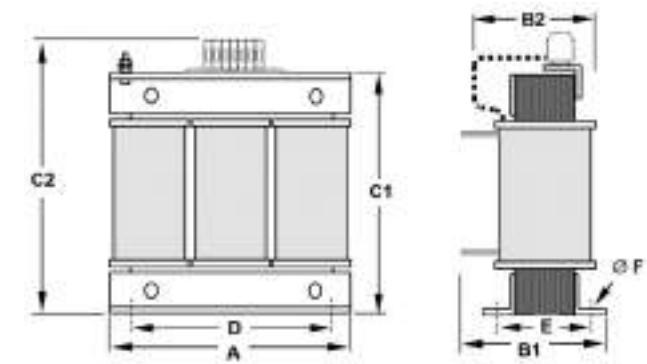

Chokes

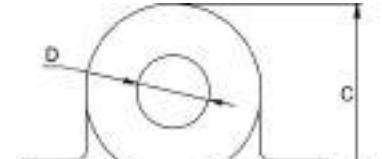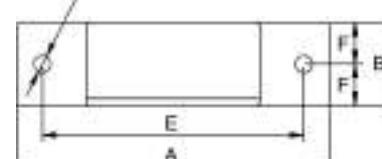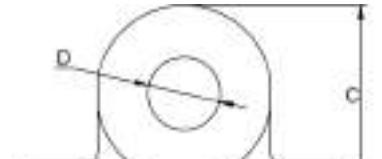Reference	D (diameter)	Motor (kW)	Dimensions (mm)							Weight (Kg)	
			A	B	C	D	E	F	G (diameter)		
AX-FER2102-PE	21	< 2.2	86	24	50	21	70	12	4	0.09	
AX-FER2815-PE	28	< 15	106	25	65	28	90	12.5		0.22	
AX-FER5045-PE	50	< 45	150	51	112	50	125	30	5	0.53	

Braking resistor

Fig. 1

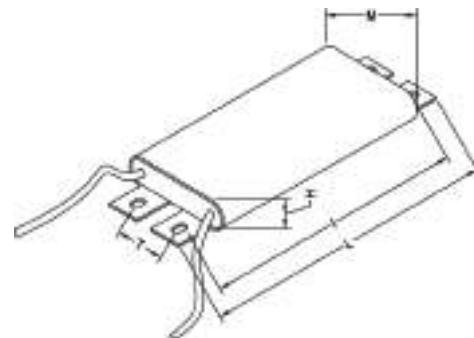


Fig. 2




Fig. 3

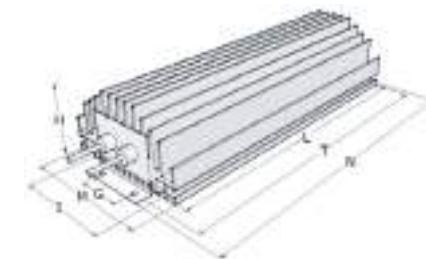


Fig. 4


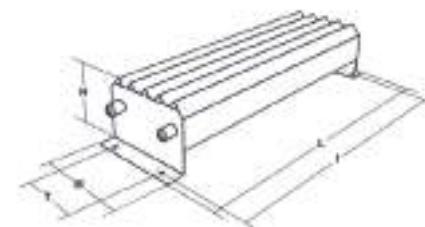



Fig. 5

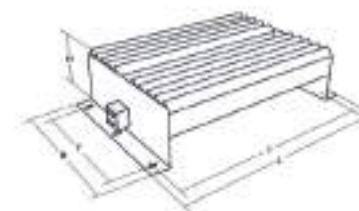

Type	Fig	Dimensions (mm)								Weight (kg)
		L	H	M	I	T	G	N		
AX-REM00K1xxx-IE	1	182	13	45	168	20				0.27
AX-REM00K2xxx-IE		105			94					0.17
AX-REM00K3xxx-IE		155			144					0.26
AX-REM00K4xxx-IE		200			189					0.425
AX-REM00K6xxx-IE		320			309					0.73
AX-REM00K9xxx-IE	2	200				216			230	1.41
AX-REM01K1xxx-IE		260				276			290	1.83
AX-REM01K3xxx-IE		320				336			350	2.25
AX-REM01K9xxx-IE		365	73	105	350	70				4
AX-REM02K1xxx-IE	3	310			295					7
AX-REM03K5xxx-IE		365	115	230	350	170				8

Installation

Standard connections

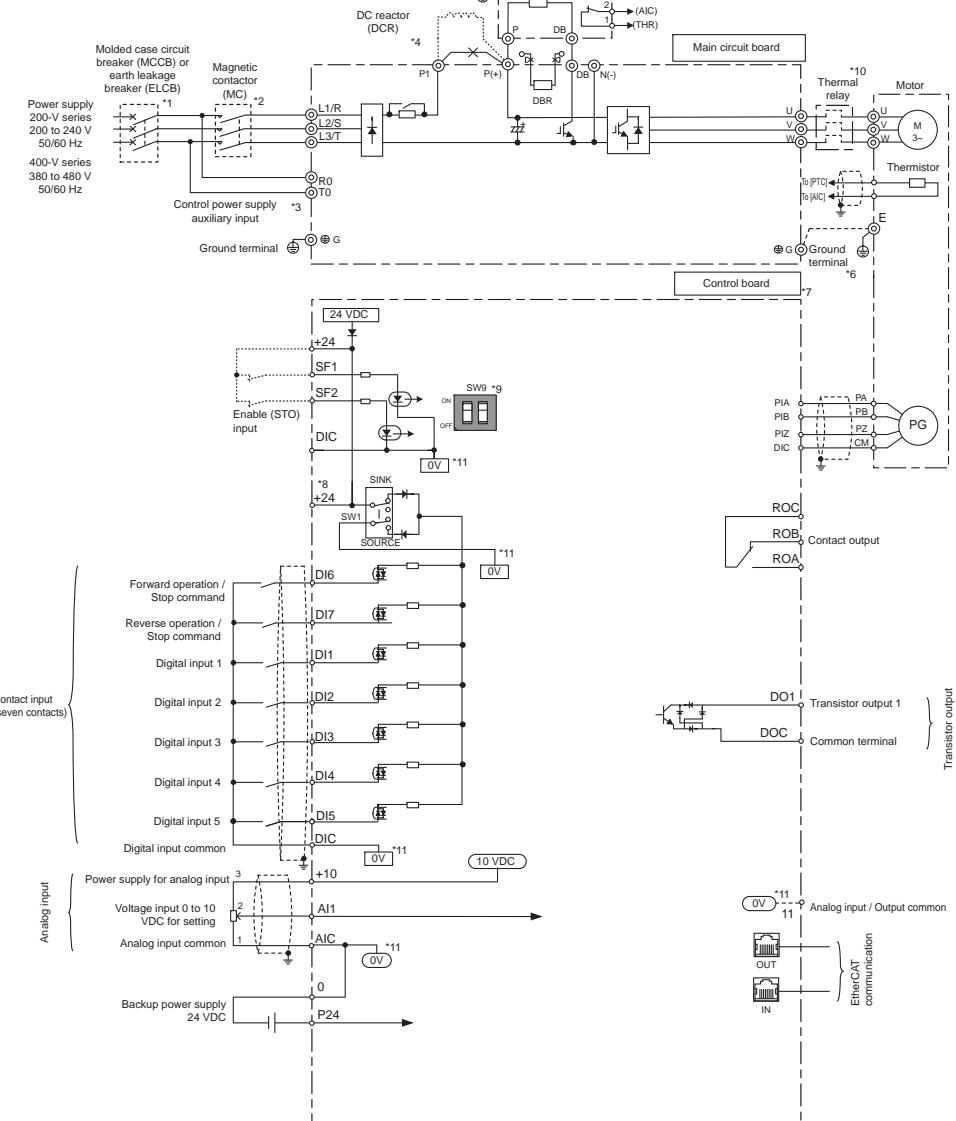

Main circuit


Terminal	Name	Function
L1/R, L2/S, L3/T	Main supply terminals (3G3M1-A2 and 3G3M1-A4)	Used to connect a power supply
L1/L, L2/N	Main circuit power supply input (3G3M1-AB_)	Used to connect a power supply
U, V, W	Inverter output terminal	Used to connect a motor
P(+), DB	Braking resistor connection	To connect a braking resistor
P1, P(+)	DC reactor connection	Remove the short-circuit to connect the optional DC reactor
P(+), N(-)	Regenerative braking unit connection terminal	Connect optional regenerative braking unit if braking torque produced by internal braking transistor is not enough
R0, T0	Control power supply auxiliary input	Only available for inverter size of 18 KW or more. Helps to keep control signal, digital operator or communications alive while main supply is off. 3G3M1-A2185: Single-phase 200 to 240 V, 50/60Hz 3G3M1-A4185/220: Single-phase 220 to 480 V, 50/60Hz
G	Ground terminal	Connect the terminal to ground.

Control circuit

Type	Terminal	Name	Function (Signal level)
Digital input signals	DI1	Multi-Function Digital Input 1 (Multi-speed 1)	Voltage levels between input and the DIC: ON voltage: 20 V min OFF voltage 2 V max Maximum 27 VDC Load current (DI1, DI2): 2.5 to 16 mA (at 27 V) Load current (DI3 to DI7): 2.5 to 5 mA (at 27 V) Impedance: 5.4 kΩ
	DI2	Multi-Function Digital Input 2 (Multi-speed 2)	
	DI3	Multi-Function Digital Input 3 (Multi-speed 3)	
	DI4	Multi-Function Digital Input 4 (Free run stop)	
	DI5	Multi-Function Digital Input 5 (Reset)	
	DI6	Multi-Function Digital Input 6 (Forward)	
	DI7	Multi-Function Digital Input 7 (Reverse)	
	DIC	Input Signal common	Common terminal for the digital input.
Safety digital inputs	SF1	Safe input 1	Voltage levels between input and the DIC ON voltage: 20 V min OFF voltage: 2 V max Maximum 27 VDC Load current: 2.5 to 5 mA (at 27 V) Impedance: 6.6 kΩ
	SF2	Safe input 2	
Pulse	PIA	Pulse and encoder input	Voltage between input and DIC (5 to 24 VDC) ON voltage: 4 V min OFF voltage: 2 V max Maximum 27 VDC Frequency: 32 KHz max Impedance: 7.2 kΩ
	PIB		
	PIZ		

Type	Terminal	Name	Function (Signal level)
Analog input signals	+10	Power supply for analog input	Max current: 10 mA
	AI1	Analog voltage input	Allowable input voltage range: -15 to 10 VDC Impedance: 22 kΩ
	AIC	Analog input common	
	PTC	External thermistor input	Thermistor between the PTC and the AIC.
Fault relay output	ROA	Relay output terminal NO	Relay output 250 VAC, 0.3 A 48 VDC, 0.5 A
	ROB	Relay output terminal NC	
	ROC	Relay output common	
Multi-function photocoupler outputs	DO1	Multi-Function Photocoupler Output 1 (During Run)	Open collector output across DO1-DOC Max Voltage 48 VDC and 50 mA
	DOC	Output signal common	
Power supply	+24	Power supply terminal	Max 100 mA
	P24	Auxiliary power supply input for control circuit.	P24 terminal is insulated from +24 terminal 24 VDC (22 to 26 V) and 500 mA max.
	0		

Side by side mounting

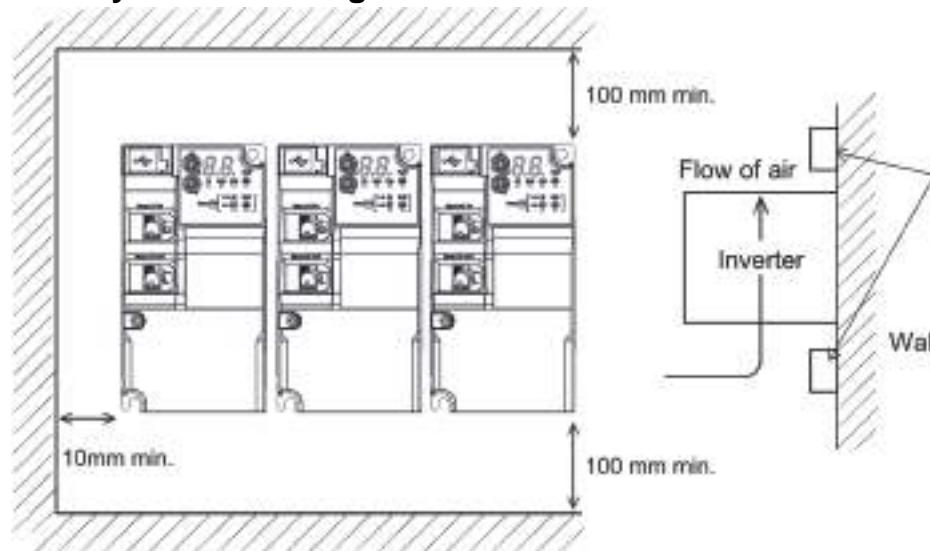


ADD 4 mm gap between drives (Side by side reduces by 10 °C ambient temperature specifications)

Drive watt loss

Max motor capacity	200 V			400 V		
	Loss at 0 % load [W]	Loss at 100 % load of the rated current [W]	Efficiency at 100 % load [W]	Loss at 0 % load [W]	Loss at 100 % load of the rated current [W]	Efficiency at 100 % load [W]
0.2	10	22	90	—	—	—
0.4	10	30	93	10	35	92
0.75	12 (10) ^{*1}	48	94	10	56	93
1.5	12	79	95	12	96	94
2.2	12	104	95.5	12	116	95
3	—	—	—	12	125	96
3.7	12	154	96	—	—	—
4	—	—	—	12	167	96
5.5	14	229	96	14	229	96
7.5	14	313	96	14	296	96.2
11	19	458	96	19	411	96.4
15	19	625	96	19	528	96.5

*1. The value in parentheses () for single phase 200 V class inverter

Ordering information

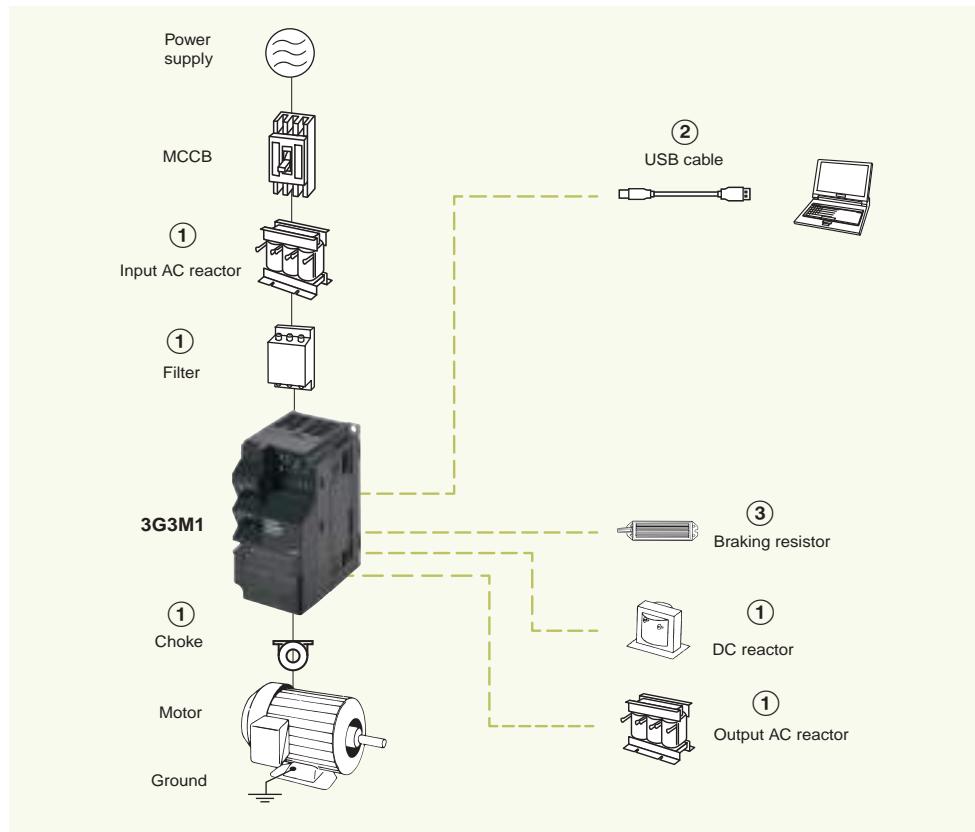

M1 drive

Voltage	Specifications								Model 3G3M1-□	
	ND		HD		HND		HHD			
	Max motor (kW)	Rated current (A)								
Single phase 200 V	-				0.4	1.9	0.2	1.6	AB002-ECT	
					0.55	3.5	0.4	3.0	AB004-ECT	
					1.1	5.3	0.75	5.0	AB007-ECT	
					2.2	9.6	1.5	8.0	AB015-ECT	
					3	11.2	2.2	11	AB022-ECT	
					-		3.7	17.5	AB037-ECT	
					0.4	2.0	0.2	1.6	A2002-ECT	
					0.75	3.5	0.4	3.0	A2004-ECT	
					1.1	6.0	0.75	5.0	A2007-ECT	
					2.2	9.6	1.5	8.0	A2015-ECT	
3 phase 200 V	-				3.0	12	2.2	11	A2022-ECT	
					5.5	19.6	3.7	17.5	A2037-ECT	
					7.5	30	5.5	25	A2055-ECT	
					11	40	7.5	33	A2075-ECT	
					15	56	11	47	A2110-ECT	
					18.5	69	15	60	A2150-ECT	
					22	88	18.5	76	A2185-ECT	
		0.75	2.1	0.75	1.8	0.75	2.1	0.4	1.8	
		1.5	4.1	1.1	3.4	1.1	4.1	0.75	3.4	
		2.2	5.5	2.2	5	2.2	5.5	1.5	4.8	
3 phase 400 V	-	3.0	6.9	3.0	6.3	3.0	6.9	2.2	5.5	
		4	9.2	4	8.8	4	8.8	3	7.2	
		5.5	12	5.5	11.1	5.5	11.1	4	9.2	
		11	21.5	7.5	17.5	7.5	17.5	5.5	14.8	
		15	28.5	11	23	11	23	7.5	18	
		18.5	37	15	31	15	31	11	24	
		22	44	18.5	38	18.5	38	15	31	
		30	59	22	45	22	45	18.5	39	
		37	72	30	60	30	60	22	45	
									A4220-ECT	

① Line filters

Drive		Standard line filter		Low leakage line filter	
Voltage	Model 3G3M1-A□-ECT	Reference	Current (A)	Reference	Current (A)
Single-phase 200 V	B002 to B007	AX-FIC1014-SE	13.8	AX-FIC1014-SE-LL	13.8
	B015	AX-FIC1021-SE	20.2	AX-FIC1021-SE-LL	20.2
	B022	AX-FIC1026-SE	26	AX-FIC1026-SE-LL	26
	B037	AX-FIC1045-SE	45.4	AX-FIC1045-SE-LL	45.4
Three-phase 200 V	2001/2002	AX-FIC4004-SE	3.9	AX-FIC4004-SE-LL	3.9
	2004/2007	AX-FIC4011-SE	11.3	AX-FIC4011-SE-LL	11.3
	2015	AX-FIC4017-SE	16.8	AX-FIC4017-SE-LL	16.8
	2022/2037/2055	AX-FIC4044-SE	43.8	AX-FIC4044-SE-LL	43.8
	2075/2110	AX-FIC4061-SE	60.6	AX-FIC4061-SE-LL	60.6
	2150	–	Contact Omron for details	–	
	2185	–	Contact Omron for details	–	
	4004/4007	AX-FIC4004-SE	3.9	AX-FIC4004-SE-LL	3.9
Three-phase 400 V	4015/4022	AX-FIC4011-SE	11.3	AX-FIC4011-SE-LL	11.3
	4030/4040	AX-FIC4017-SE	16.8	AX-FIC4017-SE-LL	16.8
	4055/4075	AX-FIC4044-SE	43.8 ^{*1}	AX-FIC4044-SE-LL	43.8 ^{*1}
	4110/4150	AX-FIC4061-SE	60.6 ^{*1}	AX-FIC4061-SE-LL	60.6 ^{*1}
	4185/4220	AX-FIC4095-SE	94.3 ^{*1}	AX-FIC4095-SE-LL	94.3 ^{*1}

^{*1}. Current at 40°C

Note: 200 V Three-phase filters are not footprint. (Smaller filter could be used in some cases if DC reactor is used).

① DC reactors

400 V Three phase						200 V Single phase					
3G3M1	Rating	Reference	mH	A	Losses W	3G3M1	Rating	Reference	mH	A	Losses W
4004-ECT	HHD	AX-RC43000020-DE	43.0	2.0	17	B002-ECT	HHD	AX-RC10700032-DE	10.7	3.2	14
	HD/HND	AX-RC27000030-DE	27.0	3.0	21		HND	AX-RC06750061-DE	6.75	6.1	18
	ND	AX-RC27000030-DE	27.0	3.0	21		HHD	AX-RC06750061-DE	6.75	6.1	18
4007-ECT	HHD	AX-RC27000030-DE	27.0	3.0	21	B004-ECT	HND	AX-RC03510093-DE	3.51	9.3	20
	HD/HND	AX-RC14000047-DE	14.0	4.7	25		HHD	AX-RC03510093-DE	3.51	9.3	20
	ND	AX-RC14000047-DE	14.0	4.7	25		HND	AX-RC02510138-DE	2.51	13.8	24
4015-ECT	HHD	AX-RC14000047-DE	14.0	4.7	25	B015-ECT	HHD	AX-RC02510138-DE	2.51	13.8	24
	HD/HND	AX-RC10100069-DE	10.1	6.9	28		HND	AX-RC01600223-DE	1.60	22.3	30
	ND	AX-RC10100069-DE	10.1	6.9	28		HHD	AX-RC01600223-DE	1.60	22.3	30
4022-ECT	HHD	AX-RC10100069-DE	10.1	6.9	28	B022-ECT	HND	AX-RC01110309-DE	1.11	30.9	40
	HD/HND	AX-RC06400116-DE	6.4	11.6	32		HHD	AX-RC01110309-DE	1.11	30.9	40
	ND	AX-RC06400116-DE	6.4	11.6	32		HND	—			
4030-ECT	HHD	AX-RC06400116-DE	6.4	11.6	32	200 V Three phase					
	HD/HND	AX-RC06400116-DE	6.4	11.6	32	2002-ECT	HHD	AX-RC21400016-DE	21.4	1.6	7
	ND	AX-RC06400116-DE	6.4	11.6	32		HND	AX-RC10700032-DE	10.7	3.2	14
4040-ECT	HHD	AX-RC06400116-DE	6.4	11.6	32	2004-ECT	HHD	AX-RC10700032-DE	10.7	3.2	14
	HD/HND	AX-RC04410167-DE	4.4	16.7	40		HND	AX-RC06750061-DE	6.75	6.1	18
	ND	AX-RC04410167-DE	4.4	16.7	40		HHD	AX-RC06750061-DE	6.75	6.1	18
4055-ECT	HHD	AX-RC04410167-DE	4.4	16.7	40	2007-ECT	HND	AX-RC03510093-DE	3.51	9.3	20
	HD/HND	AX-RC03350219-DE	3.35	21.9	47		HHD	AX-RC03510093-DE	3.51	9.3	20
	ND	AX-RC02330307-DE	2.33	30.7	63		HND	AX-RC02510138-DE	2.51	13.8	24
4075-ECT	HHD	AX-RC03350219-DE	3.35	21.9	47	2022-ECT	HHD	AX-RC02510138-DE	2.51	13.8	24
	HD/HND	AX-RC02330307-DE	2.33	30.7	63		HND	AX-RC01600223-DE	1.60	22.3	30
	ND	AX-RC01750430-DE	1.75	43.0	77		HHD	AX-RC01600223-DE	1.60	22.3	30
4110-ECT	HHD	AX-RC02330307-DE	2.33	30.7	63	2037-ECT	HND	AX-RC01110309-DE	1.11	30.9	40
	HD/HND	AX-RC01750430-DE	1.75	43.0	77		HHD	AX-RC01110309-DE	1.11	30.9	40
	ND	AX-RC01750430-DE	1.75	43.0	77		HND	AX-RC00840437-DE	0.84	43.7	46
4150-ECT	HHD	AX-RC01750430-DE	1.75	43.0	77	2075-ECT	HHD	AX-RC00840437-DE	0.84	43.7	46
	HD/HND	AX-RC01750430-DE	1.75	43.0	77		HND	AX-RC00590614-DE	0.59	61.4	60
	ND	AX-RC01200644-DE	1.20	64.4	99		HHD	AX-RC00590614-DE	0.59	61.4	60
4185-ECT	HHD	AX-RC01750430-DE	1.75	43.0	77	2110-ECT	HND	AX-RC00440859-DE	0.44	85.9	75
	HD/HND	AX-RC01200644-DE	1.20	64.4	99		HHD	AX-RC00440859-DE	0.44	85.9	75
	ND	AX-RC00920797-DE	0.92	79.7	111		HND	AX-RC00440859-DE	0.44	85.9	75
4220-ECT	HHD	AX-RC01200644-DE	1.20	64.4	99	2185-ECT	HHD	AX-RC00440859-DE	0.44	85.9	75
	HD/HND	AX-RC00920797-DE	0.92	79.7	111		HND	AX-RC00301275-DE	0.3	127.5	107
	ND	AX-RC00920797-DE*	0.92	79.7	111		—				

① Input AC reactor (Considering DC reactor is installed)

400 V Three phase						200 V Single phase					
3G3M1	Rating	Reference	mH	A	Losses	3G3M1	Rating	Reference	mH	A	Losses
4004-ECT	HHD	AX-RAI07700042-DE	7.7	4.2	32	B002-ECT	HHD	AX-RAI02000070-DE	2.0	7.0	14
	HD/HND	AX-RAI07700042-DE	7.7	4.2	32		HND	AX-RAI02000070-DE	2.0	7.0	14
	ND	AX-RAI07700042-DE	7.7	4.2	32		HHD	AX-RAI02000070-DE	2.0	7.0	14
4007-ECT	HHD	AX-RAI03700040-DE	3.7	4.0	18	B004-ECT	HND	AX-RAI02000070-DE	2.0	7.0	14
	HD/HND	AX-RAI03700040-DE	3.7	4.0	18		HHD	AX-RAI01700140-DE	1.7	14.0	22
	ND	AX-RAI03700040-DE	3.7	4.0	18		HND	AX-RAI01700140-DE	1.7	14.0	22
4015-ECT	HHD	AX-RAI02800080-DE	2.8	8.0	31	B015-ECT	HHD	AX-RAI01700140-DE	1.7	14.0	22
	HD/HND	AX-RAI02800080-DE	2.8	8.0	31		HND	AX-RAI01700140-DE	1.7	14.0	22
	ND	AX-RAI02800080-DE	2.8	8.0	31		HHD	AX-RAI01200200-DE	1.2	20.0	24
4022-ECT	HHD	AX-RAI01630090-DE	1.63	9.0	40	B022-ECT	HND	AX-RAI00630240-DE	0.63	24.0	26
	HD/HND	AX-RAI01630090-DE	1.63	9.0	40		HHD	AX-RAI00210330-DE*1	0.21	33.0	69
	ND	AX-RAI01630090-DE	1.63	9.0	40		-				
4030-ECT	HHD	AX-RAI01630090-DE	1.63	9.0	40	200 V Three phase					
	HD/HND	AX-RAI01630090-DE	1.63	9.0	40	2002-ECT	HHD	AX-RAI02920030-DE	2.92	3.0	8
	ND	AX-RAI01630090-DE	1.63	9.0	40		HND	AX-RAI02920030-DE	2.92	3.0	8
4040-ECT	HHD	AX-RAI01300170-DE	1.30	17.0	67	2004-ECT	HHD	AX-RAI01570050-DE	1.57	5.0	12
	HD/HND	AX-RAI01300170-DE	1.30	17.0	67		HND	AX-RAI01570050-DE	1.57	5.0	12
	ND	AX-RAI01300170-DE	1.30	17.0	67		HHD	AX-RAI01570050-DE	1.57	5.0	12
4055-ECT	HHD	AX-RAI00810180-DE	0.81	18.0	79	2007-ECT	HND	AX-RAI00940080-DE	0.94	8.0	18
	HD/HND	AX-RAI00810180-DE	0.81	18.0	79		HHD	AX-RAI00940080-DE	0.94	8.0	18
	ND	AX-RAI00740335-DE	0.74	33.5	79		HND	AX-RAI00670110-DE	0.67	11.0	24
4075-ECT	HHD	AX-RAI00810180-DE	0.81	18.0	79	2022-ECT	HHD	AX-RAI00670110-DE	0.67	11.0	24
	HD/HND	AX-RAI00740335-DE	0.74	33.5	240		HND	AX-RAI00450170-DE	0.45	17.0	39
	ND	AX-RAI00440300-DE	0.44	30.0	119		HHD	AX-RAI00450170-DE	0.45	17.0	39
4110-ECT	HHD	AX-RAI00740335-DE	0.74	33.5	240	2037-ECT	HND	AX-RAI00290250-DE	0.29	25.0	54
	HD/HND	AX-RAI00440300-DE	0.44	30.0	119		HHD	AX-RAI00290250-DE	0.29	25.0	54
	ND	AX-RAI00360500-DE	0.36	50.0	85		HND	AX-RAI00210330-DE	0.21	33.0	69
4150-ECT	HHD	AX-RAI00440300-DE	0.44	30.0	119	2075-ECT	HHD	AX-RAI00210330-DE	0.21	33.0	69
	HD/HND	AX-RAI00360500-DE	0.36	50.0	85		HND	AX-RAI00180670-DE	0.18	67.0	71
	ND	AX-RAI00300450-DE	0.30	45.0	182		HHD	AX-RAI00180670-DE	0.18	67.0	71
4185-ECT	HHD	AX-RAI00360500-DE	0.36	50.0	85	2110-ECT	HND	AX-RAI00110600-DE	0.11	60.0	119
	HD/HND	AX-RAI00300450-DE	0.30	45.0	182		HHD	AX-RAI00110600-DE	0.11	60.0	119
	ND	AX-RAI00191150-DE	0.19	115.0	177		HND	AX-RAI00091000-DE	0.09	100.0	84
4220-ECT	HHD	AX-RAI00290780-DE	0.29	78.0	116	2185-ECT	HHD	AX-RAI00091000-DE	0.09	100.0	84
	HD/HND	AX-RAI00191150-DE	0.19	115.0	177		HND	AX-RAI00076870-DE	0.07	87.0	173
	ND	AX-RAI00191150-DE	0.19	115.0	177	-					

Note: This table corresponds with ND/HND rating. When using HD in some case it could be possible to select a smaller size.

① Output AC reactors

200 V					Three-phase 400 V					
3G3M1-A□-ECT	Rating	Output AC reactor	mH	A	3G3M1-A□-ECT	Rating	Output AC reactor	mH	A	
B002/2002	HHD	AX-RAO11500026-DE	11.5	2.6	4004	HHD	AX-RAO16300038-DE	16.3	3.8	
	HND	AX-RAO11500026-DE	11.5	2.6		HD/HND	AX-RAO16300038-DE	16.3	3.8	
B004/2004	HHD	AX-RAO07600042-DE	7.6	4.2		ND	AX-RAO16300038-DE	16.3	3.8	
	HND	AX-RAO07600042-DE	7.6	4.2	4007	HHD	AX-RAO16300038-DE	16.3	3.8	
B007/2007	HHD	AX-RAO04100075-DE	4.1	7.5		HD/HND	AX-RAO11800053-DE	11.8	5.3	
	HND	AX-RAO04100075-DE	4.1	7.5		ND	AX-RAO11800053-DE	11.8	5.3	
B015/2015	HHD	AX-RAO03000105-DE	3.0	10.5	4015/4022	HHD	AX-RAO11800053-DE	11.8	5.3	
	HND	AX-RAO03000105-DE	3.0	10.5		HD/HND	AX-RAO07300080-DE	7.3	8.0	
B022/2022	HHD	AX-RAO01830160-DE	1.8	16.0		ND	AX-RAO07300080-DE	7.3	8.0	
	HND	AX-RAO01830160-DE	1.8	16.0	4030	HHD	AX-RAO04600110-DE	4.6	11.0	
B037/2037	HHD	AX-RAO01150220-DE	1.15	22.0		HD/HND	AX-RAO04600110-DE	4.6	11.0	
	HND	AX-RAO01150220-DE	1.15	22.0		ND	AX-RAO04600110-DE	4.6	11.0	
2055	HHD	AX-RAO00950320-DE	0.95	32.0	4040	HHD	AX-RAO04600110-DE	4.6	11.0	
	HND	AX-RAO00950320-DE	0.95	32.0		HD/HND	AX-RAO03600160-DE	3.6	16.0	
2075	HHD	AX-RAO00630430-DE	0.63	43.0		ND	AX-RAO03600160-DE	3.6	16.0	
	HND	AX-RAO00630430-DE	0.63	43.0	4055	HHD	AX-RAO03600160-DE	3.6	16.0	
2110	HHD	AX-RAO00490640-DE	0.49	64.0		HD/HND	AX-RAO02500220-DE	2.5	22.0	
	HND	AX-RAO00490640-DE	0.49	64.0		ND	AX-RAO02500220-DE	2.5	22.0	
2150	HHD	AX-RAO00490640-DE	0.49	64.0	4075	HHD	AX-RAO02500220-DE	2.5	22.0	
	HND	AX-RAO00390800-DE	0.39	80.0		HD/HND	AX-RAO02000320-DE	0.20	32.0	
2185	HHD	AX-RAO00390800-DE	0.39	80.0		ND	AX-RAO02000320-DE	0.20	32.0	
	HND	AX-RAO00330950-DE	0.33	95.0	4110	HHD	AX-RAO02000320-DE	0.20	32.0	
-						HD/HND	AX-RAO02000320-DE	0.20	32.0	
-						ND	AX-RAO01650400-DE	0.16	40.0	
-						HHD	AX-RAO01650400-DE	0.16	40.0	
-					4150	HD/HND	AX-RAO01650400-DE	0.16	40.0	
-						ND	AX-RAO01300480-DE	0.13	48.0	
-						HHD	AX-RAO01300480-DE	0.13	48.0	
-					4185	HD/HND	AX-RAO01300480-DE	0.13	48.0	
-						ND	AX-RAO00800750-DE	0.08	75.0	
-						HHD	AX-RAO01300480-DE	0.13	48.0	
-					4220	HD/HND	AX-RAO00800750-DE	0.08	75.0	
-						ND	AX-RAO00800750-DE	0.08	75.0	

Note: This table corresponds with ND/HND rating. When using HD in some case it could be possible to select a smaller size.

① Chokes

Diameter	Description	Model
21	For 2.2 KW motors or below	AX-FER2102-PE
28	For 15 KW motors or below	AX-FER2815-PE
50	For 45 KW motors or below	AX-FER5045-PE

② Accessories

Description	Functions	Model
USB cable	Use a commercially available USB cable that is double-shielded, gold-plated and supports USB 2.0. The Micro B type USB cable can be used.	–

Software tools

Description	Functions	Number licenses	Media	Model
Sysmac Studio Standard Edition Ver.1.XX	The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including NJ/NX-series CPU Units, NY-series Industrial PC, EtherCAT Slaves, and HMI. Sysmac Studio runs on the following OS: Windows 7 (32-bit/64-bit version)/Windows 8.1 (32-bit/64-bit version) Windows 10 (32-bit/64-bit version)/Windows 11 (64-bit version) This software provides functions of the Vision Edition. Refer to your local OMRON website for details such as supported models and functions.	(Media only)	Sysmac Studio (32 bit) DVD	SYSMAC-SE200D
	(Media only)	Sysmac Studio (64 bit) DVD	SYSMAC-SE200D-64	
	1 license	–	SYSMAC-SE201L	
	1 license	–	SYSMAC-DE001L	
Sysmac Studio Drive Edition Ver.1.XX	Sysmac Studio Drive Edition is a limited license that provides selected functions required for 1S-series Servo, G5-series Servo and M1 Series Inverter System settings. Because this product is a license only, you need the Sysmac Studio Standard Edition DVD media to install it.			

③ Braking resistor

Voltage	3G3M1-A□-ECT	Conn. min. resistance	Resistor proposal fast stop (10s not cyclic)		Braking resistor (3% ED, 10 sec)				Braking resistor (10% ED, 10sec)		
			Model	Specifications	Model	Specifications	Model	Specifications	Model	Specifications	Model
1 phase 200 V	B002	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K2100-IE	200 W	100 Ω
	B004		AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K2100-IE	200 W	100 Ω
	B007		AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K2100-IE	200 W	100 Ω
	B015	40 Ω	AX-REM00K2040-IE	200 W	40 Ω	AX-REM00K2050-IE	200 W	50 Ω	AX-REM00K4050-IE	400 W	50 Ω
	B022		AX-REM00K2040-IE	200 W	40 Ω	AX-REM00K2050-IE	200 W	50 Ω	AX-REM00K4050-IE	400 W	50 Ω
	B037		AX-REM00K4040-IE	400 W	40 Ω	AX-REM00K4050-IE	400 W	50 Ω	AX-REM00K6050-IE	600 W	50 Ω
3 phase 400 V	4004	200 Ω	AX-REM00K1200-IE	100 W	200 Ω	AX-REM00K1200-IE	100 W	200 Ω	AX-REM00K4200-IE	400 W	200 Ω
	4007		AX-REM00K1200-IE	100 W	200 Ω	AX-REM00K1200-IE	100 W	200 Ω	AX-REM00K4200-IE	400 W	200 Ω
	4015	160 Ω	AX-REM00K3160-IE	300 W	160 Ω	AX-REM00K1200-IE	100 W	200 Ω	AX-REM00K4200-IE	400 W	200 Ω
	4022		AX-REM00K3160-IE	300 W	160 Ω	AX-REM00K1200-IE	100 W	200 Ω	AX-REM00K4200-IE	400 W	200 Ω
	4030	130 Ω	AX-REM00K4130-IE	400 W	130 Ω	AX-REM00K2150-IE	200 W	150 Ω	AX-REM00K6150-IE	600 W	150 Ω
	4040		AX-REM00K4130-IE	400 W	130 Ω	AX-REM00K2150-IE	200 W	150 Ω	AX-REM00K6150-IE	600 W	150 Ω
	4055	80 Ω	AX-REM00K6080-IE	600 W	80 Ω	AX-REM00K3100-IE	300 W	100 Ω	AX-REM00K9100-IE	900 W	100 Ω
	4075	60 Ω	AX-REM00K9060-IE	900 W	60 Ω	AX-REM00K4070-IE	400 W	70 Ω	AX-REM01K3070-IE	1300 W	70 Ω
	4110	40 Ω	AX-REM00K9040-IE	900 W	40 Ω	AX-REM00K4050-IE	400 W	50 Ω	AX-REM01K9050-IE	1900 W	50 Ω
	4150	34.4 Ω	AX-REM00K9040-IE	900 W	40 Ω	AX-REM00K4050-IE	400 W	50 Ω	AX-REM01K9050-IE	1900 W	50 Ω
	4185	16 Ω	AX-REM01K9017-IE	1900 W	17 Ω	AX-REM01K1020-IE	1100 W	20 Ω	AX-REM03K5020-IE	3500 W	20 Ω
	4220		AX-REM01K9017-IE	1900 W	17 Ω	AX-REM01K1020-IE	1100 W	20 Ω	AX-REM03K5020-IE	3500 W	20 Ω
3 phase 200 V	2002	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K2100-IE	200 W	100 Ω
	2004		AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K2100-IE	200 W	100 Ω
	2007		AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K1100-IE	100 W	100 Ω	AX-REM00K2100-IE	200 W	100 Ω
	2015	40 Ω	AX-REM00K2040-IE	200 W	40 Ω	AX-REM00K2050-IE	200 W	50 Ω	AX-REM00K4050-IE	400 W	50 Ω
	2022		AX-REM00K2040-IE	200 W	40 Ω	AX-REM00K2050-IE	200 W	50 Ω	AX-REM00K4050-IE	400 W	50 Ω
	2037	33 Ω	AX-REM00K4035-IE	400 W	35 Ω	AX-REM00K2040-IE	200 W	40 Ω	AX-REM00K4040-IE	400 W	40 Ω
	2055	20 Ω	AX-REM00K4020-IE	400 W	20 Ω	AX-REM00K3025-IE	300 W	25 Ω	AX-REM00K6030-IE	600 W	30 Ω
	2075	15 Ω	AX-REM00K6015-IE	600 W	15 Ω	AX-REM00K4020-IE	400 W	20 Ω	AX-REM00K9020-IE	900 W	20 Ω
	2110	10 Ω	AX-REM00K9010-IE	900 W	10 Ω	AX-REM00K6015-IE	600 W	15 Ω	AX-REM001K1015-IE	1100 W	15 Ω
	2150	8.6 Ω	AX-REM00K9010-IE	900 W	10 Ω	AX-REM00K6015-IE	600 W	15 Ω	AX-REM001K1015-IE	1100 W	15 Ω
	2185	4 Ω	AX-REM02K1004-IE	2000 W	4 Ω	AX-REM00K9006-IE	900 W	6 Ω	AX-REM03K5006-IE	3500 W	6 Ω

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. I219E-EN-01

In the interest of product improvement, specifications are subject to change without notice.