



"A08AF" SERIES COSTECH FANS

Description: **Axial fan a.c. 80x80x25mm**

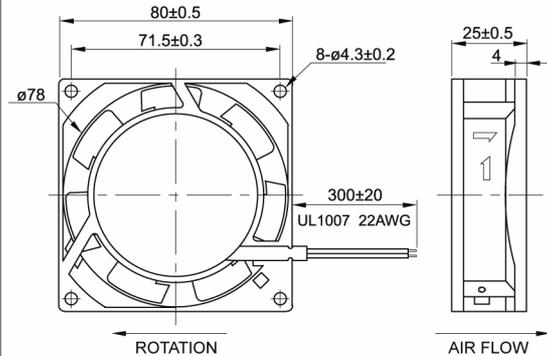

Casing material: Black varnished aluminum
Impeller material: Black fibreglass reinforced plastic (PBT PC) UL 94V-0
Protection degree: IP20, according to EN 60529 standard
Fixing system: by No 4 M4 screws
Motor protection: Impedance
Storage temperature: from -40°C to +80°C
Rated temperature range: from -40°C to +70°C
Lifetime L10 at 40°C: over 40,000 h (ball bearing); over 15,000 h (sleeve bearing)
Electrical connection: 2 leads 22AWG UL 1007, 300 mm long.
Approvals: UL E223195
Weight: 0.26 kg

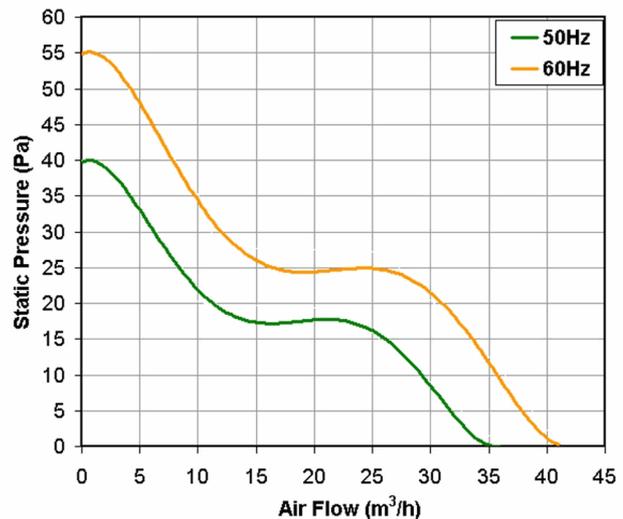

Model	Bearing	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m3/h)	Static Pressure (Pa)	Noise [db(A)]	RPM (rpm)	Approvals
A08A12HWBF00	Ball	115 V a.c.	50/60	0.150/0.120	14/11	36/41	40/55	32.0/35.0	2,600/3,100	CE; cURus
A08A12HWSF00	Sleeve	115 V a.c.	50/60	0.150/0.120	14/11	36/41	40/55	32.0/35.0	2,600/3,100	CE; cURus
A08A23HTSF00	Sleeve	230 V a.c.	50/60	0.080/0.070	16/14	36/41	40/55	32.0/35.0	2,600/3,100	CE
A08A23HWBF00	Ball	230 V a.c.	50/60	0.080/0.070	16/14	36/41	40/55	32.0/35.0	2,600/3,100	CE; UR
A08A23HWSF00	Sleeve	230 V a.c.	50/60	0.080/0.070	16/14	36/41	40/55	32.0/35.0	2,600/3,100	CE; UR

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.